


iQ300
LI15021TH
stainless steel
Slimline hood, 60 cm

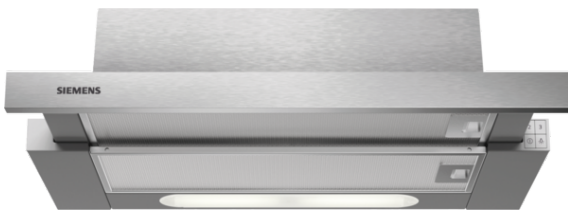

The powerful telescopic cooker hood practically disappears into the upper cabinet.

✓ The 380 m3/h extraction rate supplies clean air when cooking.

Features

Technical Data

Typology : Pull-out
 Approval certificates : CE, VDE
 Length electrical supply cord (cm) : 150
 Required niche size for installation (HxWxD) : 140mm x 550mm x 280mm
 Net weight (kg) : 6.2
 Type of control : mechanical
 Number of speed settings : 3
 Maximum output recirculating air (m3/h) : 209
 Number of lights : 2
 Diameter of air outlet (mm) : 120
 Grease filter material : Washable aluminium
 Odour filter : Yes
 Operating Mode : Convertible
 Optional accessories : LZ26000
 Type of lamps used : Halogen
 Total power of the lamps (W) : 56; 28
 Grease filter type : Kasette
 Connection Rating (W) : 170
 Current (A) : 10
 Voltage (V) : 220-240
 Frequency (Hz) : 50
 Plug type : no plug
 Installation typology : Built-in
 Material body : Lacquered
 Approval certificates : CE, VDE
 Plug type : no plug
 Dimensions of the product, with chimney (if exists) (in) : / x x
 Dimensions of the packed product (in) : 9.44 x 13.77 x 24.80
 Net weight (lbs) : 14
 Gross weight (lbs) : 17
 Motor location : Integrated motor in hood body
 No-return airflow flap : No
 Length electrical supply cord (cm) : 150
 Dimensions of the product, with chimney (if exists) (mm) : 180 x 598 x 300
 Dimensions of the packed product (HxWxD) (mm) : 240 x 350 x 630
 Net weight (kg) : 6.2
 Gross weight (kg) : 8.0

Included accessories

1 x active carbon filter




iQ300
LI15021TH
stainless steel
Slimline hood, 60 cm

Features

- For installation in a special wall cupboard (60 cm)
- Suitable for ducted or re-circulated extraction
- Metal grease filter, dishwasher safe
- push buttons for extractor speeds and light
- 3 speeds
-
-
- Ducted extraction rate according to DIN/EN 61591: max. 380 m³/h
- Power rating: 170 W
- 120 mm diameter pipe

iQ300
 LI15021TH
 stainless steel
 Slimline hood, 60 cm

Dimensioned drawings

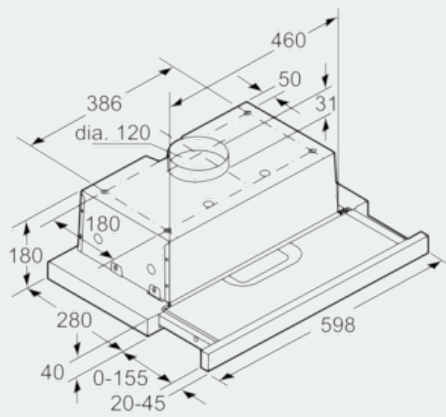

measurements in mm